


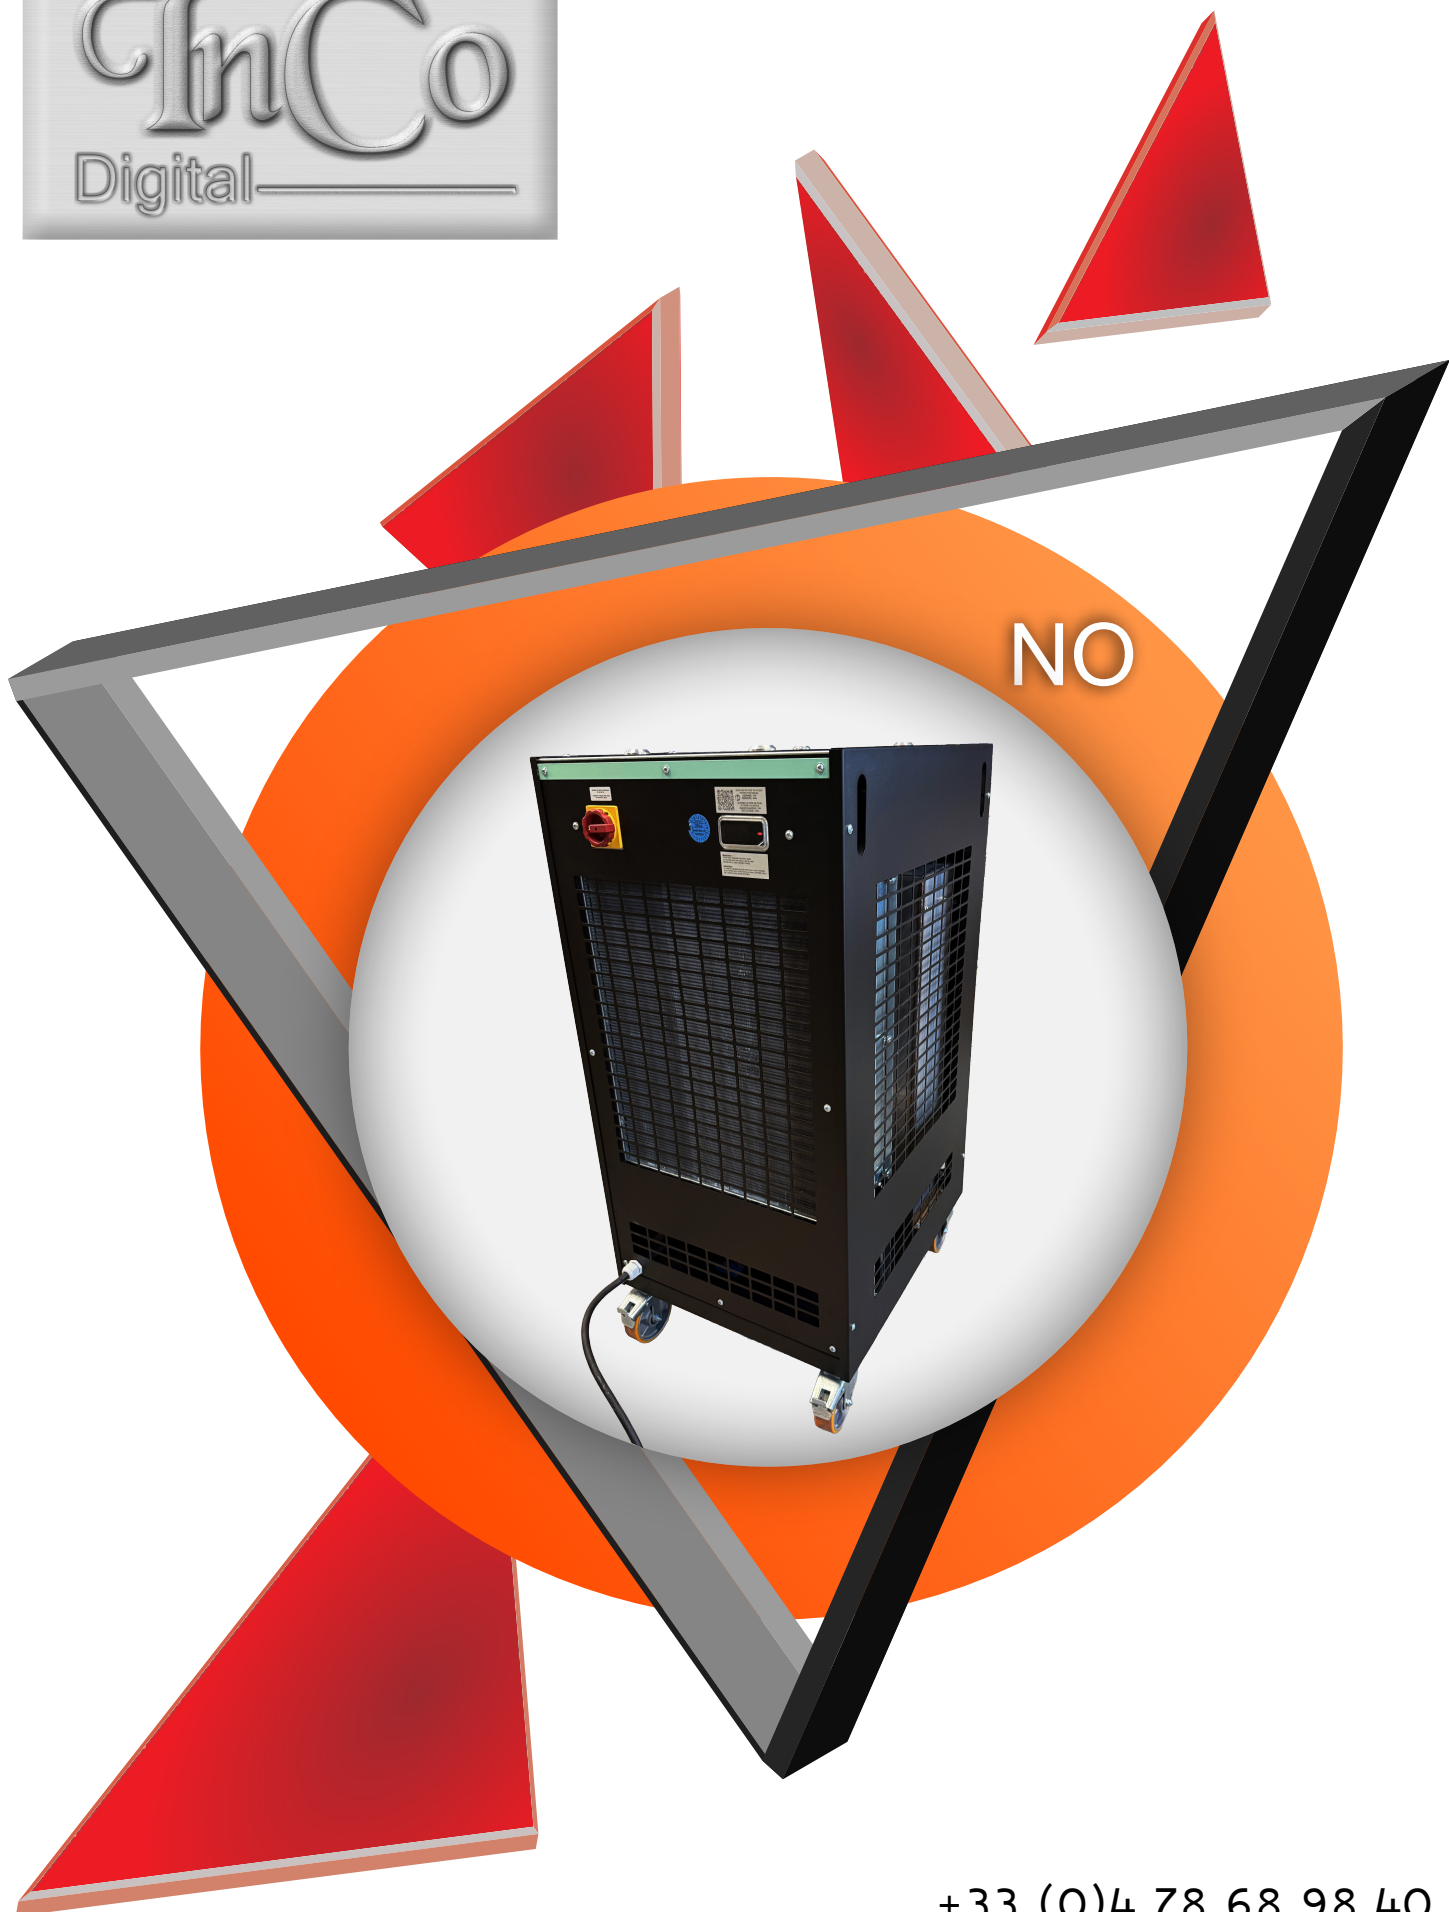

+33 (0)4 78 68 98 40

NO PRODUCT COMPACT CHILLERS

SIZE 5-24

BODYWORK

Panel paint: Color RAL 9005

Frame on castor wheels

REFRIGERATION CIRCUIT

Rotary or Scroll compressor, R32 fluid

Stainless steel plates evaporator

Thermostatic valve

Condenser with copper tubes and aluminum fins

Propeller-type axial fan

HYDRAULIC CIRCUIT

Stainless steel open buffer tank 20 liters

High-pressure stainless-steel pump 6 bar

Automatic discharge valve

Visual level, filling, draining

Industrial hoses

Hydraulic connections Inlet/Outlet 1''F

ELECTRICAL PANEL

Electronic controller with display (NFC/RS485)

Phase rotation controller

Motor thermal magnetic protection

Switch-disconnector

Network voltage AC 400V - 3ph+N* - 50Hz

(*neutral required only on NO5 and NO8)



NO5 -> NO24

Package « e »

- Reinforce roof structure
- Generator positioning system
- Hydraulic connections in/out 3/4''M

TECHNICAL SPECIFICATIONS

NO PRODUCT	Cooling Capacity	Water Flow rate	Length	Width	Height	Weight
	kW	l/min	mm	mm	mm	kg
NO5	5.5	14	742	598	1311	180
NO8	8.4	14	742	598	1311	185
NO11	10.1	14	742	598	1311	200
NO14	14.9	14	742	598	1311	205
NO19	17.3	20	742	598	1311	210
NO24	23.4	26	742	598	1311	215

Outlet water temperature 20°C – Air inlet temperature 35°C